

L-71222


特點

- 100萬組數位編碼互不干擾
- 自動對碼
- 接收器採用防水設計
- DIY設計，省卻安裝費用
- 可裝設在無法安裝開關之場所
- 適用於各種家電、照明產品

適用範圍

用於小家電電源控制，例如：

- 電扇、音響、小家電等...

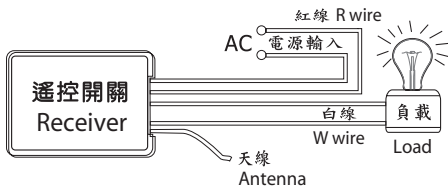

Feature

- Digital learning code system to avoid interference
- Code learning fast, approximately 10 seconds for per duplication
- 1 million learning code
- Switch ON / OFF function
- Water-proof receiver
- Valid for the electrical appliance within the request power loading

Applications

- Suitable for household electrical appliance, such as electric fans, video, etc.

型號 Model No. L-71222	輸入電壓 Input Voltage (V)	遙控距離 Distance (V)	最大負載 Rated Load (W)	工作頻率 Working Frequency	尺寸 Dimension (mm)
發射器 Transmitter	12VDC	80M	500W	315 /433.92MHz	54*40*16mm
接收器 Receiver	110 -240VAC 50/60Hz				65*45*22mm

L-73111

特點

- 100萬組數位編碼互不干擾
- 遙控器可任意擺放，遙控不受空間限制
- 遙控距離長達80公尺
- DIY設計，省卻安裝費用
- 可裝設在無法安裝開關之場所
- 燈飾照明專用

適用範圍

用於燈具照明電源控制，例如：

- 螢光燈管、日光燈、美術燈、省電燈泡

Feature

- Digital learning code system to avoid interference
- Code learning fast, approximately 10 seconds for per duplication
- 1 million learning code
- Switch ON / OFF function
- Water-proof receiver
- Energy saving solution for the lighting system
- Valid for the lighting within the request power loading

Applications

- Suitable for lighting, such as fluorescent lamp, saving energy lamp, bulb, decorative lamp etc.

型號 Model No. L-73111	輸入電壓 Input Voltage (V)	遙控距離 Distance (M)	最大負載 Rated Load (W)	工作頻率 Working Frequency	尺寸 Dimension (mm)
發射器 Transmitter	12VDC	80M	500W	315 /433.92MHz	130*44*22mm
接收器 Receiver	110 -240VAC 50/60Hz				65*45*22mm