

### 特點

- 與鹵素MR16燈具完全相容，可直接取代任何鹵素燈
- 無重影
- 低耗電量，節能省電
- 無紫外線及紅外光
- 優良的散熱設計，壽命較長

### 適用範圍


精品展示櫥窗、家庭照明、娛樂場所、咖啡酒吧展示廳、商場辦公樓。

### Features

- Suitable and compatible to all halogen fixtures
- None UV and IR radiation
- No multi-shadow
- Low power consumption & long life
- Aluminum alloy heat sink housing

### Applications

Indoor partial close-up lighting schemes, household lighting, entertainment places, shopping mall and commercial building lighting

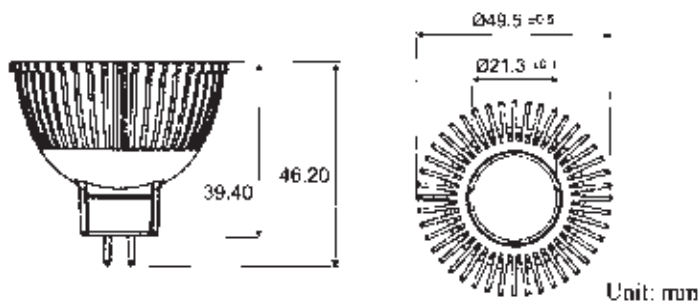

型號 Model No.	輸入電壓 Input voltage (V)	光角 Beam Angle (°)	系統功率 System Consumption (W)	色溫 Color Temperature (K)	光通量 Luminous Flux (Lm)	演色性 CRI (Ra)	壽命 Life Span (H)	燈座 Socket Base	尺寸 Dimension (mm)
LED-010303A	12VAC/DC	30	5W	3000±200K(warm white)	270Lm	80	40,000hrs	GU5.3	Ø 50*46.2mm
LED-010603A				6000±200K(white)	300Lm	75			



Model No.: LD-813123

## LED 驅動電源 LD-813123

## LED Power Supply

- 輸入電壓 / Input voltage : AC100 -240V, 50/60Hz
- 輸出功率 / Output power : 3W
- 輸出電壓 / Output voltage : DC12V
- 輸出電流 / Output current : 350mA
- 尺寸 / Dimension : 59 x 20 x 19 mm (LxWxH)