

特點

- 採用大功率光源, 壽命可達30000-50000小時
- 本體為鋁合金材質, 散熱性佳, 性能穩定, 啟動快, 無頻閃, 低光衰
- 搭配高性能恆流驅動電源, 達到高效節能的目的
- 綠色環保, 不含鉛、汞等有害物質, 不產生紫外光、紅外光等輻射
- 採用光學透鏡材質, 透光率高

Features

- Using high power LED light sources, life span is up to 30,000-50,000Hrs
- Aluminum alloy, good heat dissipation, stable performance, starting fast, no flickering
- With constant-current power supply, conversion efficiency is greater and energy saving
- No mercury pollution, no UV and IR radiation
- Using optical lens, high transmittance



page 08-09

適用範圍


超市、商場、餐廳、飯店、展覽館、會議室及家庭等場所的照明裝飾

Applications

Used for illumination in supermarket, shop, hotel, showroom, home, factory, hospital and public places.

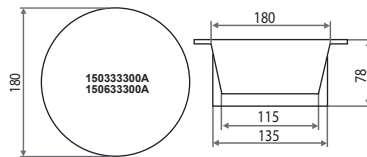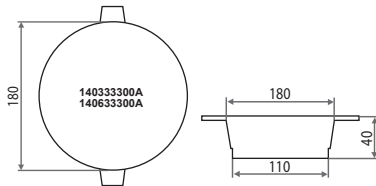

型號 Model No.	LED功率 LED Power (W)	系統功率 System Consumption (W)	光通量 Luminous Flux (Lm)	光角 Beam Angle (°)	色溫 Color Temperature (K)	演色性 Color Rendering Index (Ra)	燈珠數量 Number of LEDs	工作溫度 Operating Temperature (°C)	開孔孔徑 Cutting Hole (mm)	尺寸 Dimension (mm)
LEDW-140333300A	10W	12W	975Lm	120°	3000±10%(warm white)	85	150	-10~50°C	Ø150	Ø180 x 40
LEDW-140633300A			1000Lm		6000±10%(white)	80				
LED-150333300A			975Lm		3000±10%(warm white)	85				
LED-150633300A			1000Lm		6000±10%(white)	80				Ø180 x 78

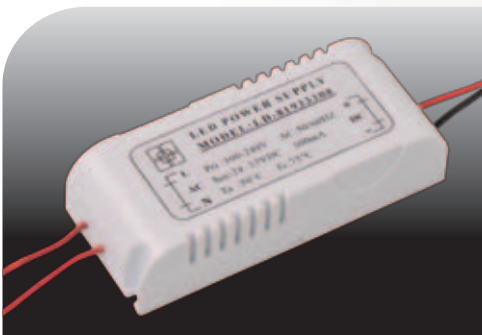

LED 筒燈驅動電源 LD-81933300

LED Power Supply

Model No.:LD-81933300

- 輸入電壓/ Input voltage : AC100 -240V, 50/60Hz
- 輸出電壓/ Output voltage : DC24~33V
- 輸出電流/ Output current : 300mA
- 尺寸/ Dimension : 96 x 41 x 23 mm (LxWxH)